


# Time switch ASTROCLOCK-1L

DATA

Technical data		
Power supply	230V 50/60 Hz	
Switching capacity	2 x 16 (10) A / 250 V~	
Maximum recommended loads (N.O.)	Incandescent lamps	3000 W
	Fluorescent lamps	1200 VA
	Low voltage halogen lamps	2000 VA
	Halogens (230 V)	3000 W
	Low-consumption lamps	600 VA
	Downlights	400 VA
	LEDs	600 VA
Contact type and material	Changeover AgSnO <sub>2</sub>	
Power consumption	6 VA 1 circuit (aprox. 1 W)	
Memory spaces	22	
Type of switchings	ON, OFF, ASTRONOMIC	
Switching accuracy	Better than 1 second	
Operating accuracy	± 1 s/ day at 23 °C	
Power reserve	4 years (Lithium battery) at 23 °C	
Operating temperature	- 10 °C to + 45 °C	
Protection category	IP 20 according to EN 60529	
Protection class	II when mounted as intended	
Sealable cover		

## Connection

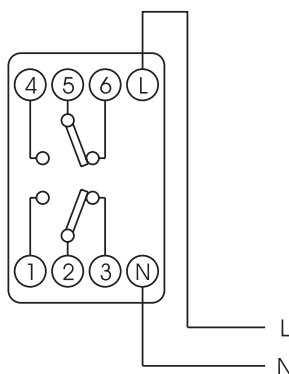

## Dimensions

