

EDS4D and EDS8D socket assemblies with handle

Completely pre-wired enclosure with sockets and circuit breakers with 10kA short-circuit resistance. In RCD version with A-type protection.

Small enclosure 305x190x106mm, with bracket are intended as part of a movable distribution system.

Fitted with 250V sockets with ground pin or SCHUKO. The 250V sockets are rotated by 90° for trouble-free use of angled plugs

Five-pole CEE 400V socket with 16A and 32A ratings

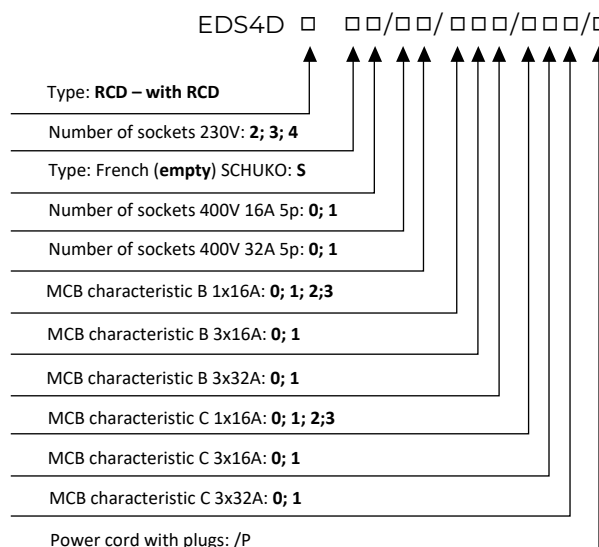
- Compliant to standard: *EN 61439-3*
- Mechanical resistance of enclosure: *IK10*
- Protection level: *IP44*
- Material: *ABS*
- Operating temperature: *-25 °C to +55 °C*
- Rated working voltage: *400VAC, 250VAC, 50/60Hz*
- Max. connection cable 5x4mm² with ferrule, cable gland Pg21 included



A gland is included for cable output and a clamping clip is provided to prevent the supply line from being pulled out.



Example: *EDS4D RCD 2 /1 0/1 0 /0 0 0*





On request, it can be made with a 2m supply cable and a 16 or 32A 5p plug based on the switchboard rated current (variant /P).

Select of typical version with RCD, sockets 250V with SCHUKO						Sockets 250V 2P+T		Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key			16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105822	EDS4D RCD 4S B		B	16	EDS4D RCD 4S/00/200/000	4				2					
001105823	EDS4D RCD 4S C		C		EDS4D RCD 4S/00/000/200	4							2		

Select of typical version with RCD, sockets 250V with ground pin						Sockets 250V 2P+T		Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key			16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105820	EDS4D RCD 4 B		B	16	EDS4D RCD 4/00/200/000	4				2					
001105821	EDS4D RCD 4 C		C		EDS4D RCD 4/00/000/200	4							2		

Select of typical version without RCD, sockets 250V with SCHUKO						Sockets 250V 2P+T		Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key			16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105832	EDS4D 2S/2 16 B		B	32	EDS4D 2S/20/110/000	2	2			1	1				
001105833	EDS4D 2S/2 16 B+C		B+C		EDS4D 2S/20/100/100	2	2			1				1	
001105834	EDS4D 2S/2 16 C		C		EDS4D 2S/20/000/110	2	2						1	1	
001105835	EDS4D 2S/2 16/32 B		B	32	EDS4D 2S/11/110/000	2	1	1		1	1				
001105836	EDS4D 2S/2 16/32 B+C		B+C		EDS4D 2S/11/100/100	2	1	1		1				1	
001105837	EDS4D 2S/2 16/32 C		C		EDS4D 2S/11/000/110	2	1	1					1	1	
001105838	EDS4D 4S B		B	16	EDS4D RCD 4S/00/400/000	4				4					
001105839	EDS4D 4S C		C		EDS4D RCD 4S/00/000/400	4							4		

Select of typical version without RCD, sockets 250V with ground pin						Sockets 250V 2P+T		Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key			16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105824	EDS4D 2/2 16 B		B	32	EDS4D 2/20/110/000	2	2			1	1				
001105825	EDS4D 2/2 16 B+C		B+C		EDS4D 2/20/100/100	2	2			1				1	
001105826	EDS4D 2/2 16 C		C		EDS4D 2/20/000/110	2	2						1	1	
001105827	EDS4D 2/2 16/32 B		B	32	EDS4D 2/11/110/000	2	1	1		1	1				
001105828	EDS4D 2/2 16/32 B+C		B+C		EDS4D 2/11/100/100	2	1	1		1				1	
001105829	EDS4D 2/2 16/32 C		C		EDS4D 2/11/000/110	2	1	1					1	1	
001105830	EDS4D 4 B		B	16	EDS4D RCD 4/00/400/000	4				4					
001105831	EDS4D 4 C		C		EDS4D RCD 4/00/000/400	4							4		

Select of typical version xqwith RCD, sockets 250V SCHUKO						Sockets 250V 2P+T	Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key		16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105862	EDS8D RCD 2S/1 16 B		B	32	EDS8D RCD 2S/10/110/000	2	1		1	1				
001105863	EDS8D RCD 2S/1 16 B+C		B+C		EDS8D RCD 2S/10/100/010	2	1		1				1	
001105864	EDS8D RCD 2S/1 16 C		C		EDS8D RCD 2S/10/000/110	2	1					1	1	
001105865	EDS8D RCD 2S/1 32 B		B	32	EDS8D RCD 2S/01/101/000	2		1	1		1			
001105866	EDS8D RCD 2S/1 32 B+C		B+C		EDS8D RCD 2S/01/100/001	2		1	1					1
001105867	EDS8D RCD 2S/1 32 C		C		EDS8D RCD 2S/01/000/101	2		1				1		1
001105872	EDS8D RCD 3S B 3F		B	16	EDS8D RCD 3S/00/300/000	3			3					
001105873	EDS8D RCD 3S C 3F		C		EDS8D RCD 3S/00/000/300	3						3		
001105874	EDS8D RCD 4S B 3F		B	16	EDS8D RCD 4S/00/300/000	4			3					
001105875	EDS8D RCD 4S C 3F		C		EDS8D RCD 4S/00/000/300	4						3		

Select of typical version with RCD, sockets 250V with ground pin						Sockets 250V 2P+T	Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key		16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105848	EDS8D RCD 2/1 16 B		B	32	EDS8D RCD 2/10/110/000	2	1		1	1				
001105849	EDS8D RCD 2/1 16 B+C		B+C		EDS8D RCD 2/10/100/010	2	1		1				1	
001105850	EDS8D RCD 2/1 16 C		C		EDS8D RCD 2/10/000/110	2	1					1	1	
001105851	EDS8D RCD 2/1 32 B		B	32	EDS8D RCD 2/01/101/000	2		1	1		1			
001105852	EDS8D RCD 2/1 32 B+C		B+C		EDS8D RCD 2/01/100/001	2		1	1					1
001105853	EDS8D RCD 2/1 32 C		C		EDS8D RCD 2/01/000/101	2		1				1		1
001105858	EDS8D RCD 3 B 3F		B	16	EDS8D RCD 3/00/300/000	3			3					
001105859	EDS8D RCD 3 C 3F		C		EDS8D RCD 3/00/000/300	3						3		
001105860	EDS8D RCD 4 B 3F		B	16	EDS8D RCD 4/00/300/000	4			3					
001105861	EDS8D RCD 4 C 3F		C		EDS8D RCD 4/00/000/300	4						3		

Select of typical version without RCD, sockets 250V SCHUKO						Sockets 250V 2P+T	Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key		16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105886	EDS8D 2S/1 16 B		B	32	EDS8D 2S/10/110/000	2	1		1	1				
001105887	EDS8D 2S/1 16 B+C		B+C		EDS8D 2S/10/100/010	2	1		1				1	
001105888	EDS8D 2S/1 16 C		C		EDS8D 2S/10/000/110	2	1					1	1	
001105889	EDS8D 2S/1 32 B		B	32	EDS8D 2S/01/101/000	2		1	1		1			
001105890	EDS8D 2S/1 32 B+C		B+C		EDS8D 2S/01/100/001	2		1	1					1
001105891	EDS8D 2S/1 32 C		C		EDS8D 2S/01/000/101	2		1				1		1

Select of typical version without RCD, sockets 250V with ground pin						Sockets 250V 2P+T	Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key		16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105876	EDS8D 2/1 16 B		B	32	EDS8D 2/10/110/000	2	1		1	1				
001105877	EDS8D 2/1 16 B+C		B+C		EDS8D 2/10/100/010	2	1		1				1	
001105878	EDS8D 2/1 16 C		C		EDS8D 2/10/000/110	2	1					1	1	
001105879	EDS8D 2/1 32 B		B	32	EDS8D 2/01/101/000	2		1	1		1			
001105880	EDS8D 2/1 32 B+C		B+C		EDS8D 2/01/100/001	2		1	1					1
001105881	EDS8D 2/1 32 C		C		EDS8D 2/01/000/101	2		1				1		1