

EDS11 socket assemblies

Complete enclosure with sockets, circuit breakers, 10kA short-circuit resistant circuit breakers and, in the RCD version, an A-type protection.

Medium enclosure size of 343x241x163mm, wall mounting using fixing holes on external corners of the enclosure (hole spacing 220x324mm) or on a rack (variant EDS11S)

Fitted with 250V sockets with ground pin or SCHUKO.


Five-pole CEE 400V sockets with 16A and 32A rating

- Rated working voltage: 400VAC, 250VAC, 50/60Hz
- Compliant to standard: EN 61439-3
- Mechanical resistance of the enclosure: IK10
- Protection level: IP54
- Material: ABS
- Operating temperature: -25 to +55°C




Preformed holes for cable glands:

on the top: 2x M25/M32
on the bottom and back side: 1x M25/M32

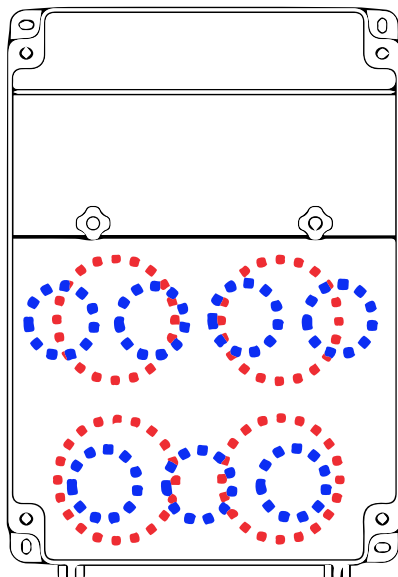

Example: EDS11 RCD 4 /11/11/0 0 0

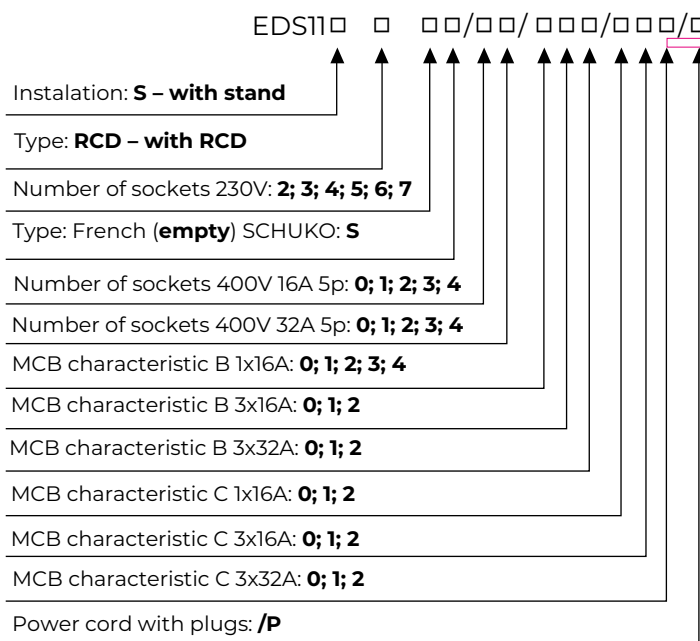




On request, it can be made with a 2m supply cable and a 16 or 32A 5p plug based on the switchboard rated current (variant /P).

Select of typical version with RCD, sockets 250V SCHUKO						Sockets 250V 2P+T	Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key		16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105260	EDS11 RCD 4S/2 16/32 B		B	40	EDS11 RCD 4S/11/111/000	4	1	1	1	1				
001105261	EDS11 RCD 4S/2 16/32 B+C		B+C		EDS11 RCD 4S/11/100/011	4	1	1	1			1	1	
001105262	EDS11 RCD 4S/2 16/32 C		C		EDS11 RCD 4S/11/000/111	4	1	1				1	1	1
001105263	EDS11 RCD 4S/2 16 B		B	40	EDS11 RCD 4S/20/120/000	4	2		1	2				
001105264	EDS11 RCD 4S/2 16 B+C		B+C		EDS11 RCD 4S/20/100/020	4	2		1				2	
001105265	EDS11 RCD 4S/2 16 C		C		EDS11 RCD 4S/20/000/120	4	2					1	2	
001105266	EDS11 RCD 4S/2 32 B		B	40	EDS11 RCD 4S/02/102/000	4		2	1		2			
001105267	EDS11 RCD 4S/2 32 B+C		B+C		EDS11 RCD 4S/02/100/002	4		2	1				2	
001105268	EDS11 RCD 4S/2 32 C		C		EDS11 RCD 4S/02/000/102	4		2				1	2	
001105269	EDS11 RCD 2S/3 16/32 B		B	40	EDS11 RCD 2S/21/111/000	2	2	1	1	1	1			
001105270	EDS11 RCD 2S/3 16/32 B+C		B+C		EDS11 RCD 2S/21/100/010	2	2	1	1				1	
001105271	EDS11 RCD 2S/3 16/32 C		C		EDS11 RCD 2S/21/000/111	2	2	1				1	1	1
001105272	EDS11 RCD 2S/3 32/16 B		B	40	EDS11 RCD 2S/12/111/000	2	1	2	1	1	1			
001105273	EDS11 RCD 2S/3 32/16 B+C		B+C		EDS11 RCD 2S/12/100/010	2	1	2	1				1	
001105274	EDS11 RCD 2S/3 32/16 C		C		EDS11 RCD 2S/12/000/111	2	1	2				1	1	1
001105275	EDS11 RCD 5S B		B	16	EDS11 RCD 5S/00/200/000	5			2					
001105276	EDS11 RCD 5S C		C		EDS11 RCD 5S/00/000/200	5						2		
001105277	EDS11 RCD 7S B		B	32	EDS11 RCD 7S/00/300/000	7			3					
001105278	EDS11 RCD 7S C		C		EDS11 RCD 7S/00/000/300	7						3		


Select of typical version without RCD, sockets 250V SCHUKO						Sockets 250V 2P+T	Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)		
Order code	Name	Assembly	MCB char.	InA (A)	Production key		16	32	1x16	3x16	3x32	1x16	3x16	3x32
001105303	EDS11 4S/2 16/32 B		B	32	EDS11 4S/11/211/000	4	1	1	2	1	1			
001105304	EDS11 4S/2 16/32 B+C		B+C		EDS11 4S/11/200/011	4	1	1	2				1	1
001105305	EDS11 4S/2 16/32 C		C		EDS11 4S/11/000/211	4	1	1				2	1	1
001105306	EDS11 4S/2 16 B		B	32	EDS11 4S/20/120/000	4	2		1	2				
001105307	EDS11 4S/2 16 B+C		B+C		EDS11 4S/20/100/020	4	2		1				2	
001105308	EDS11 4S/2 16 C		C		EDS11 4S/20/000/120	4	2					1	2	
001105309	EDS11 4S/2 32 B		B	40	EDS11 4S/02/102/000	4		2	1		2			
001105310	EDS11 4S/2 32 B+C		B+C		EDS11 4S/02/100/002	4		2	1				2	
001105311	EDS11 4S/2 32 C		C		EDS11 4S/02/000/102	4		2				1	2	
001105312	EDS11 2S/3 16/32 B		B	32	EDS11 2S/21/111/000	2	2	1	1	1	1			
001105313	EDS11 2S/3 16/32 B+C		B+C		EDS11 2S/21/100/010	2	2	1	1				1	
001105314	EDS11 2S/3 16/32 C		C		EDS11 2S/21/000/111	2	2	1				1	1	1
001105315	EDS11 2S/3 32/16 B		B	32	EDS11 2S/12/111/000	2	1	2	1	1	1			
001105316	EDS11 2S/3 32/16 B+C		B+C		EDS11 2S/12/100/010	2	1	2	1				1	
001105317	EDS11 2S/3 32/16 C		C		EDS11 2S/12/000/111	2	1	2				1	1	1
001105318	EDS11 5S B		B	32	EDS11 5S/00/200/000	5			2					
001105319	EDS11 5S C		C		EDS11 5S/00/000/200	5						2		
001105320	EDS11 7S B		B	32	EDS11 7S/00/300/000	7			3					
001105321	EDS11 7S C		C		EDS11 7S/00/000/300	7						3		

Select of typical version with RCD, sockets 250V with ground pin						Sockets 250V 2P+T	Sockets 400V (A)		MCB characteristic B (A)			MCB characteristic C (A)			
Ordercode	Name	Assembly	MCB char.	InA (A)	Production key		16	32	1x16	3x16	3x32	1x16	3x16	3x32	
001105415	EDS11 RCD 4/2 16/32 B		B	40	EDS11 RCD 4/11/111/000	4	1	1	1	1	1				
001105236	EDS11 RCD 4/2 16/32 B+C		B+C		EDS11 RCD 4/11/100/011	4	1	1	1				1	1	
001105237	EDS11 RCD 4/2 16/32 C		C		EDS11 RCD 4/11/000/111	4	1	1					1	1	1
001105238	EDS11 RCD 4/2 16 B		B	40	EDS11 RCD 4/20/120/000	4	2		1	2					
001105239	EDS11 RCD 4/2 16 B+C		B+C		EDS11 RCD 4/20/100/020	4	2		1				2		
001105240	EDS11 RCD 4/2 16 C		C		EDS11 RCD 4/20/000/120	4	2						1	2	
001105241	EDS11 RCD 4/2 32 B		B	40	EDS11 RCD 4/02/102/000	4		2	1		2				
001105242	EDS11 RCD 4/2 32 B+C		B+C		EDS11 RCD 4/02/100/002	4		2	1					2	
001105243	EDS11 RCD 4/2 32 C		C		EDS11 RCD 4/02/000/102	4		2					1		2
001105244	EDS11 RCD 2/3 16/32 B		B	40	EDS11 RCD 2/21/111/000	2	2	1	1	1	1				
001105245	EDS11 RCD 2/3 16/32 B+C		B+C		EDS11 RCD 2/21/100/010	2	2	1	1				1		
001105246	EDS11 RCD 2/3 16/32 C		C		EDS11 RCD 2/21/000/111	2	2	1					1	1	1
001105247	EDS11 RCD 2/3 32/16 B		B	40	EDS11 RCD 2/12/111/000	2	1	2	1	1	1				
001105248	EDS11 RCD 2/3 32/16 B+C		B+C		EDS11 RCD 2/12/100/010	2	1	2	1				1		
001105249	EDS11 RCD 2/3 32/16 C		C		EDS11 RCD 2/12/000/111	2	1	2					1	1	1
001105250	EDS11 RCD 5 B		B	16	EDS11 RCD 5/00/200/000	5			2						
001105251	EDS11 RCD 5 C		C		EDS11 RCD 5/00/000/200	5							2		
001105252	EDS11 RCD 7 B		B	32	EDS11 RCD 7/00/300/000	7			3						
001105253	EDS11 RCD 7 C		C		EDS11 RCD 7/00/000/300	7							3		
001105254	EDS11 RCD 0/4 16/32 B		B	40	EDS11 RCD 0/22/011/000		2	2		1	1				
001105255	EDS11 RCD 0/4 16/32 C		C		EDS11 RCD 0/22/000/011		2	2						1	1
001105256	EDS11 RCD 0/4 16 B		B	40	EDS11 RCD 0/40/020/000		4			2					
001105257	EDS11 RCD 0/4 16 C		C		EDS11 RCD 0/40/000/020		4							2	
001105258	EDS11 RCD 0/4 32 B		B	40	EDS11 RCD 0/04/002/000			4			2				
001105259	EDS11 RCD 0/4 32 C		C		EDS11 RCD 0/04/000/002			4							2

Select of typical version without RCD, sockets 250V with ground pin						Sockets 250V 2P+T	Sockets 400V (A)			MCB characteristic B (A)			MCB characteristic C (A)		
Ordercode	Name	Assembly	MCB char.	InA (A)	Production key		16	32	1x16	3x16	3x32	1x16	3x16	3x32	
001105414	EDS11 4/2 16/32 B		B	32	EDS11 4/11/211/000	4	1	1	2	1	1				
001105279	EDS11 4/2 16/32 B+C		B+C		EDS11 4/11/200/011	4	1	1	2				1	1	
001105280	EDS11 4/2 16/32 C		C		EDS11 4/11/000/211	4	1	1				2	1	1	
001105281	EDS11 4/2 16 B		B	32	EDS11 4/20/120/000	4	2		1	2					
001105282	EDS11 4/2 16 B+C		B+C		EDS11 4/20/100/020	4	2		1				2		
001105283	EDS11 4/2 16 C		C		EDS11 4/20/000/120	4	2					1	2		
001105284	EDS11 4/2 32 B		B	40	EDS11 4/02/102/000	4		2	1		2				
001105285	EDS11 4/2 32 B+C		B+C		EDS11 4/02/100/002	4		2	1					2	
001105286	EDS11 4/2 32 C		C		EDS11 4/02/000/102	4		2				1		2	
001105287	EDS11 2/3 16/32 B		B	32	EDS11 2/21/111/000	2	2	1	1	1	1				
001105288	EDS11 2/3 16/32 B+C		B+C		EDS11 2/21/100/010	2	2	1	1				1		
001105289	EDS11 2/3 16/32 C		C		EDS11 2/21/000/111	2	2	1				1	1	1	
001105290	EDS11 2/3 32/16 B		B	32	EDS11 2/12/111/000	2	1	2	1	1	1				
001105291	EDS11 2/3 32/16 B+C		B+C		EDS11 2/12/100/010	2	1	2	1				1		
001105292	EDS11 2/3 32/16 C		C		EDS11 2/12/000/111	2	1	2				1	1	1	
001105293	EDS11 5 B		B	32	EDS11 5/00/200/000	5			2						
001105294	EDS11 5 C		C		EDS11 5/00/000/200	5						2			
001105295	EDS11 7 B		B	32	EDS11 7/00/300/000	7			3						
001105296	EDS11 7 C		C		EDS11 7/00/000/300	7						3			
001105297	EDS11 0/4 16/32 B		B	32	EDS11 0/22/011/000		2	2		1	1				
001105298	EDS11 0/4 16/32 C		C		EDS11 0/22/000/011		2	2					1	1	
001105299	EDS11 0/4 16 B		B	32	EDS11 0/40/020/000		4			2					
001105300	EDS11 0/4 16 C		C		EDS11 0/40/000/020		4						2		
001105301	EDS11 0/4 32 B		B	40	EDS11 0/04/002/000			4			2				
001105302	EDS11 0/4 32 C		C		EDS11 0/04/000/002			4						2	

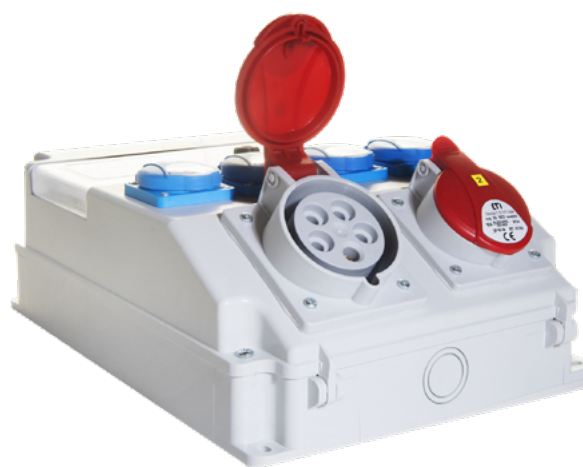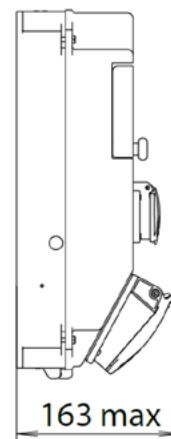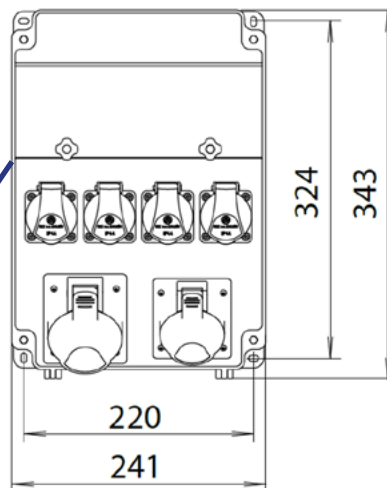

EDS11 4/2 16/32 B IP54, In = 32A ČSN EN 61 439-3

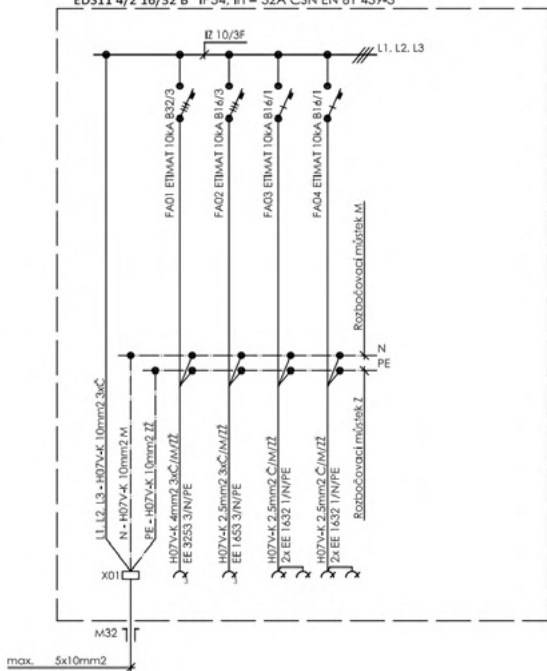

EDS11 RCD 4/2 16/32 B IP54, In = 40A ČSN EN 61 439-3

